


SMART RTD/RESISTANCE/SLIDE WIRE SIGNAL CONDITIONER

SEM1600T

- SUITABLE FOR RTD, THERMOCOUPLE AND SLIDE WIRE SENSORS
- CURRENT, VOLTAGE OR BIPOLAR VOLTAGE OUTPUT
- POWERED (10 to 32) V AC / (10 to 48) V DC SUPPLY
- 22 SEGMENT USER LINEARISATION
- SENSOR OFFSET AND OUTPUT ALIGNMENT
- ADJUSTABLE INPUT FILTER
- USB PROGRAMMABLE

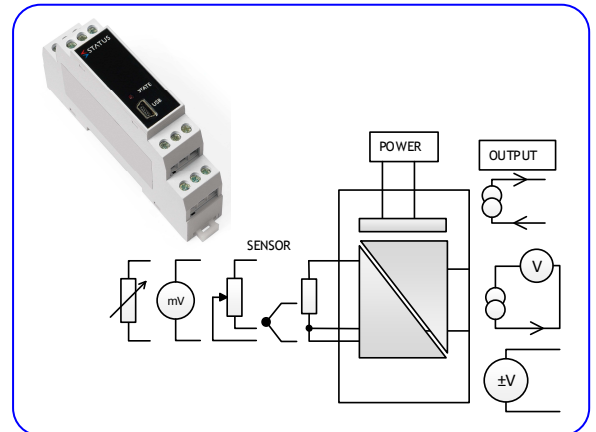


INTRODUCTION

The SEM1600T accepts resistance or mV signals from RTD, Slidewire or Thermocouple sensors. The flexible design allows the use of any resistive sensor within the range of (10 to 10500) Ω . Including Pt100, 500, 1000, Ni or Cu sensors, slide wire sensors up to 100 K Ω and 13 different thermocouple types. Other sensor characteristics or your own 22 point linearisation characteristic (for slidewire, linear resistance or mV) can be downloaded into the product enabling you to adapt it exactly to your application.

The output stage offers either voltage, bipolar voltage or current re-transmission signals. The retransmission signal can be ranged to a scale anywhere within the input process range. A transmitter power supply is provided on the output meaning the product can accept sink or source mA applications. While the voltage output will drive 2 mA into 5 K Ω @ 10 V

For ease of use, a high efficiency switch mode power supply is fitted as standard and does not require any adjustment between ac or dc applications. Operating voltages are (10 to 48) V dc and (10 to 32) V ac


Our USB interface is fitted for quick and easy configuration. Just connect a standard USB cable between the SEM1600T and your PC. Using our free configuration software, your PC will automatically upload the existing configuration data and guide you through any changes you wish to make. To further help save time, the SEM1600T does not need to be wired to a power supply during the configuration process, it is powered via the USB interface from your PC.

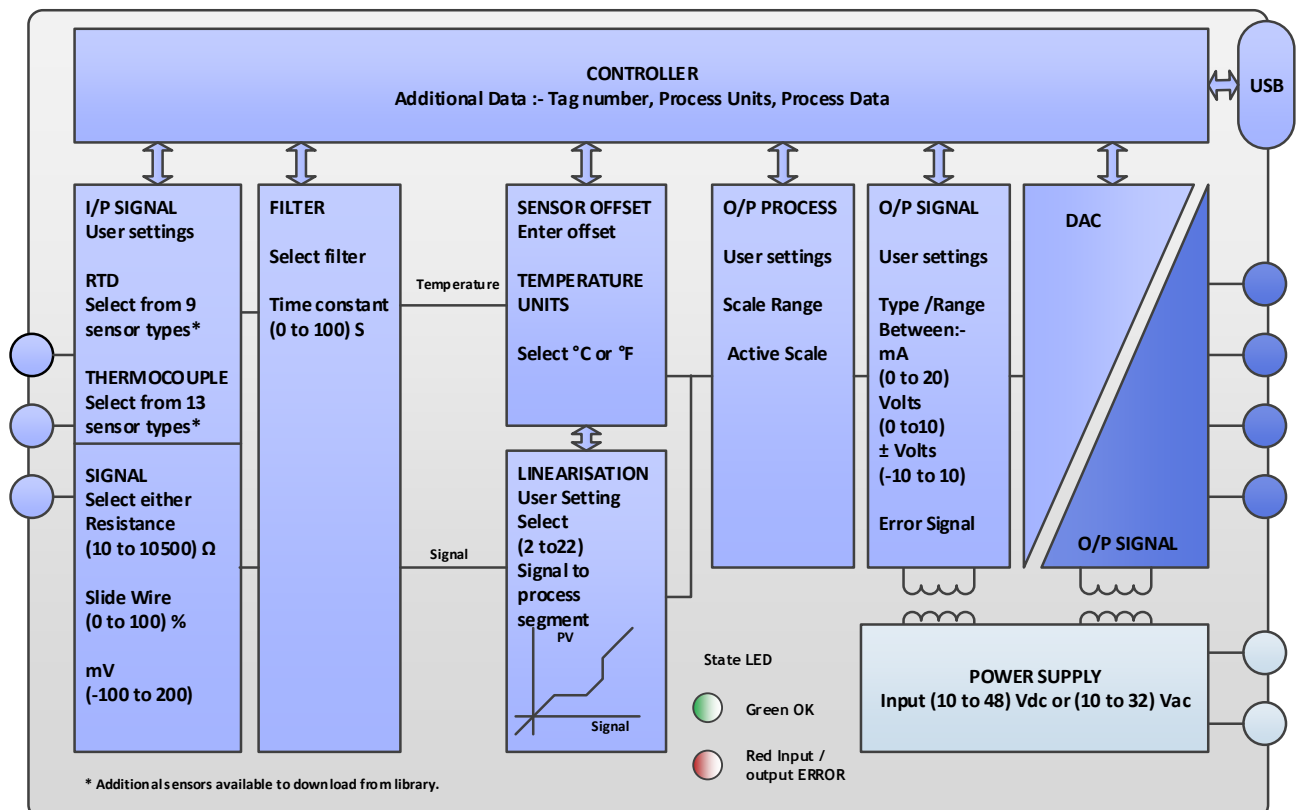

SMART RTD/RESISTANCE/SLIDE WIRE SIGNAL CONDITIONER

SPECIFICATION @20 °C

RESISTANCE RTD INPUT	
Standard RTD	PT100,PT500,PT1000, Cu100, Cu1000, Ni100, Ni120, Ni1000, Cu53, library
Slide wire	Pot range (1 to 100) K Ω , Signal (0 to 100) %, accuracy 0.1 %
Resistance	10 to 500) $\Omega \pm 0.055 \Omega$, (500 to 2500) $\Omega \pm 0.5 \Omega$, (2500 to 10500) $\Omega \pm 10.0 \Omega$.
Thermal Drift	(0 to 500) Ω 0.013 $\Omega/^{\circ}\text{C}$, (500 to 2500) Ω 0.063 $\Omega/^{\circ}\text{C}$, (2500 to 10500) Ω 0.27 $\Omega/^{\circ}\text{C}$
Excitation current	< 200 μA
Lead effect	Max lead resistance 20 Ω per leg, Effect 0.002 $^{\circ}\text{C}/\Omega$
THERMOCOUPLE mV INPUT	
Standard TC	Types K,J,E,N,T,R,S,L,U,B,C(w5),D(W3),G(W),library
mV	(-100 to 200) mV $\pm 0.02\%$ of full scale.
Thermal Drift	Thermocouple offset 0.1 $^{\circ}\text{C}/^{\circ}\text{C}$, span 0.05 $^{\circ}\text{C}/^{\circ}\text{C}$
Cold Junction	Range (-40 to 85) $^{\circ}\text{C}$, Accuracy $\pm 0.2^{\circ}\text{C}$, $\pm 0.05^{\circ}\text{C}/^{\circ}\text{C}$
OUTPUT CURRENT	
Current Source	Range (0 to 21.5) mA , Max Load 750 Ω
Current Sink	Range (0 to 21.5) mA , Supply (10 to 30) V dc, Voltage effect 0.2 $\mu\text{A}/\text{V}$
Accuracy	(mA Out/ 2000) or 5 μA whichever is the greater, Drift 1 $\mu\text{A}/^{\circ}\text{C}$
OUTPUT VOLTAGE	
Range	(0 to 10.1) V or (-10.1 to 10.1) V, Accuracy ± 5 mV
Current Drive	± 2 mA, Min load 5000 Ω @ 10 V
SUPPLY	
Range	(10 to 48) VDC , (10 to 32) VAC Protected by internal 500 mA resettable fuse.
Power	< 1W Full Power
GENERAL	
Response time	Start up 5 seconds, Update 300 mS, Response 400 mS, Warm up 2 minutes.
Galvanic Isolation	Supply to input to output 500 V dc.
LED Indication (STATE)	LED, Green when output (-0.1 to 100.1) %, else red LED, Red = input / output error
USER INTERFACE	
Type	USB 2.0
Baud rate	19,200 baud
Equipment	PC running windows XP or later, USB cable.
USER INTERFACE FUNCTIONS	
Scaling	User signal to process value scaling, for simplified setup.
Filter	Adjustable time constant (0 to 100) Seconds.
User Linearization (Profile)	(2 to 22) segments Ω (slide wire) and mV to process.
Process Units	4 Characters (signal input only)
Temperature units	$^{\circ}\text{C}$ or $^{\circ}\text{F}$ (TC, RTD inputs only)
Tag Number	20 Characters
Process Output	Range in process units
Signal Output	Select type, signal range and (temperature only) error signal.
User offset	Enter sensor offset (Temperature mode only).
Active scaling	Set output process range against active sensor input
ENVIRONMENT	
Operating Ambient	(-30 to 70) $^{\circ}\text{C}$; (10 to 90) %RH (non condensing)
Storage Ambient	(-30 to 70) $^{\circ}\text{C}$; (10 to 90) %RH (non condensing)
Configuration Ambient	(10 to 30) $^{\circ}\text{C}$
Installation Enclosure	DIN Rail enclosure offering Protection \geq IP65.
APPROVALS	
CE	BS EN 61326
MECHANICAL	
Style	DIN 43880, Colour grey, material Polymide 6.6, weight < 70 grams
Terminals	2.5 mm Maximum
SENSORS RTD	
Platinum IEC	Accuracy = 0.2 $^{\circ}\text{C}$ + ($\pm 0.05\%$ of reading) (Plus sensor)
Platinum IPTS-68	Pt100 (-200 to 850), Pt500 (-200 to 850), Pt1000 (-200 to 600)
Ni100 DIN 0.00618	Pt100 (0.00391) + Pt100 (0.00392) (-200 to 630)
Ni120 0.00672	(-60 to 180)
Ni 1000	(-70 to 180)
Ni1000 Tk5000	(-40 to 150)
Ni 507.5	(-40 to 150)
Ni 604	(-80 to 360)
Cu 53	(-200 to 200)
Cu100 0.00427	(-40 to 180)
Cu1000	(-80 to 260)
Silicon	(-80 to 260)
	KTY81-110 -120-121-122-150-210-220-221-222-250 (-55 to 175)
	KTY82-110 -120-121-122-150-210-220-221-222-250 (-55 to 175)
	KTY81-151, KTY82-151, KTY83-210-220-250-121-122 (-55 to 175)
	KTY84-130-150 (-40 to 300)
SENSORS THERMOCOUPLE	
Types	Accuracy $\pm 0.1\%$ of full scale $\pm 0.5^{\circ}\text{C}$ (plus sensor error) K (-150 to 1370), J (-200 to 1200), E (-260 to 1000), N (-270 to 1300) L (-200 to 900), U (-200 to 600), B (0 to 1820), C - D - W (0 to 2300) Accuracy $\pm 0.2\%$ of full scale $\pm 0.5^{\circ}\text{C}$ (plus sensor error) T (-270 to 400) Accuracy $\pm 0.1\%$ of full scale plus $\pm 0.5^{\circ}\text{C}$ (range 800 to 1600) R (0 to 1760), S (0 to 1760)

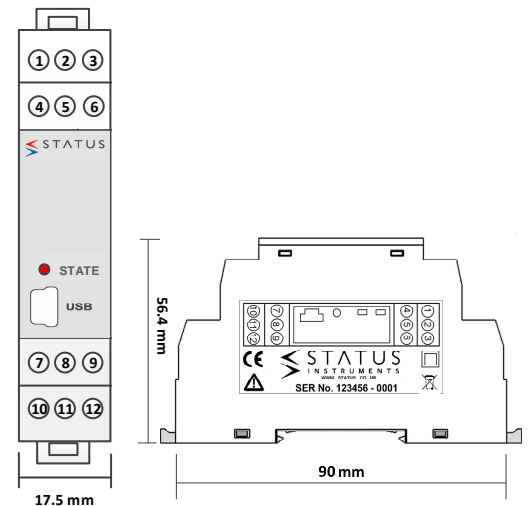

Order code:

SEM1600T

The data in this document is subject to change. Status Instruments assumes no responsibility for errors.

Status Instruments Ltd
Status Business Park
Gannaway Lane, Tewkesbury
Gloucestershire, UK
GL20 8FD

Tel: +44 (0)1684 296818
Fax: +44 (0)1684 293746
Email: sales@status.co.uk
Website: www.status.co.uk
D2538-01-06 CN5467 SEM1600T Data sheet.doc

STATUS
INSTRUMENTS